

Keep in Touch

联系我们

 (+86) 0576 8369 2229
(+86)153 8182 9498

 Alina@gtmesh.com

 BaimutangNo.1-10, Pingqiao, Tiantai, Taizhou, Zhejiang, China
中国浙江省天台县前山百亩塘工业区1-10号



 浙江国涛滤料科技有限公司
ZHEJIANG GUOTAO FILTER MATERIAL TECHNOLOGY CO.,LTD

Company Profile

公司简介

浙江国涛滤料科技有限公司始创于1990年，是一家专门专业从事过滤材料与分离设备设计制造的科技型中小企业。公司已经通过ISO9001质量管理体系认证，拥有自行进出口经营权。经过30多年的发展，现在我司新型工业滤料及填料在冶金、制药、除尘、造纸、石油化工、煤炭、化纤、化肥、陶瓷、水泥、污水处理等各环节产业，对增加效率，改善过滤效果，提高产品质量、节能降耗，起到促进和推动作用。自成立以来产品已经畅销全国各地及香港，新加坡，欧洲，北美，韩日等国际地区。塑胶网类产品全部通过欧盟环保认证，食品级接触类过滤网现已通过美国FDA全项检测条例、德国LFGB；

公司在新型填料及滤料的研究、开发设计方面具有雄厚的技术实力，部分过滤器材可替代同类型进口产品，以上海化工研究院，浙江大学，东华大学等多家科研院所为技术依托，具有深厚的技术开发优势。目前，公司已获得了12项国家专利授权，其中，发明专利2项，实用新型专利10项。

Zhejiang Guotao Filter Material Technology Co., Ltd. established in 1990, passed ISO9001, SGS, FDA, LFGB certification, EU environmental protection certification and get self Imp&Exp rights.

We are a technology-based enterprise specializing in the development, design and manufacture of separation equipment and filter materials with 30 year's experience.

Our main products are Structured packing and Knitted wire mesh demister for gas liquid separator, Filters for air conditioning, Air conditioner Filter mesh, and Silencer mesh etc. They are widely used in Distillation, Separation, Filtration and Absorption for Upstream, Chemicals, Refinery, Pesticides, Fertilizer, Power generation, Petrochemical, Pharmaceutical products, Fragrances, Fine chemical, Cement, Air conditioners and Vehicles etc.

To improve the quality, save energy and reduce consumption, we have partnerships with Zhejiang University, Donghua University and Shanghai Research Institute of Chemical Industry (SRICI) to get deep advantages in technology development. In present, we have obtained 12 national patents, including 2 invention patents and 10 utility model patents.


Because of our super quality and fast delivery, our products are more popular to all over the world especially in Hongkong, Singapore, South Korea, Japan, Pakistan, Middle-east, Europe and North America.

Warm welcome to enquiry and contact us freely, thanks!



Contents

目录





不锈钢油雾过滤器 (编织丝网) Stainless steel oil mist filter(knitted wire mesh)	01
蜂窝油烟过滤器 (波纹板) Honeycomb fume filter(corrugated plate)	03
烟罩油烟过滤器 (缠绕丝) Hood fume filter(winding wire)	05
铝网过滤器 Aluminum mesh filter	07
尼龙网过滤器 Nylon mesh filter	09
金属网过滤器 Metal mesh filter	11
初效过滤器 Pre-filter	13
袋式过滤器 Bag filter	15
高效过滤器 Hepa filter	16
尼龙过滤网 Nylon filter mesh	17
气液过滤网 Gas liquid filter mesh	18
波纹铝网 Corrugated Aluminum mesh	19
活性炭过滤网 Activate carbon filter mesh	19
喷胶纤维棉 Sprayed glue synthetic fabric	19
热熔纤维棉 Heat melted synthetic fabric	19
椰棕过滤棉 Coconut shell filter fabric	19



油烟过滤系列
Fume filter series

Stainless steel Oil mist filter (knitted wire mesh)

不锈钢油雾过滤器
(编织丝网)

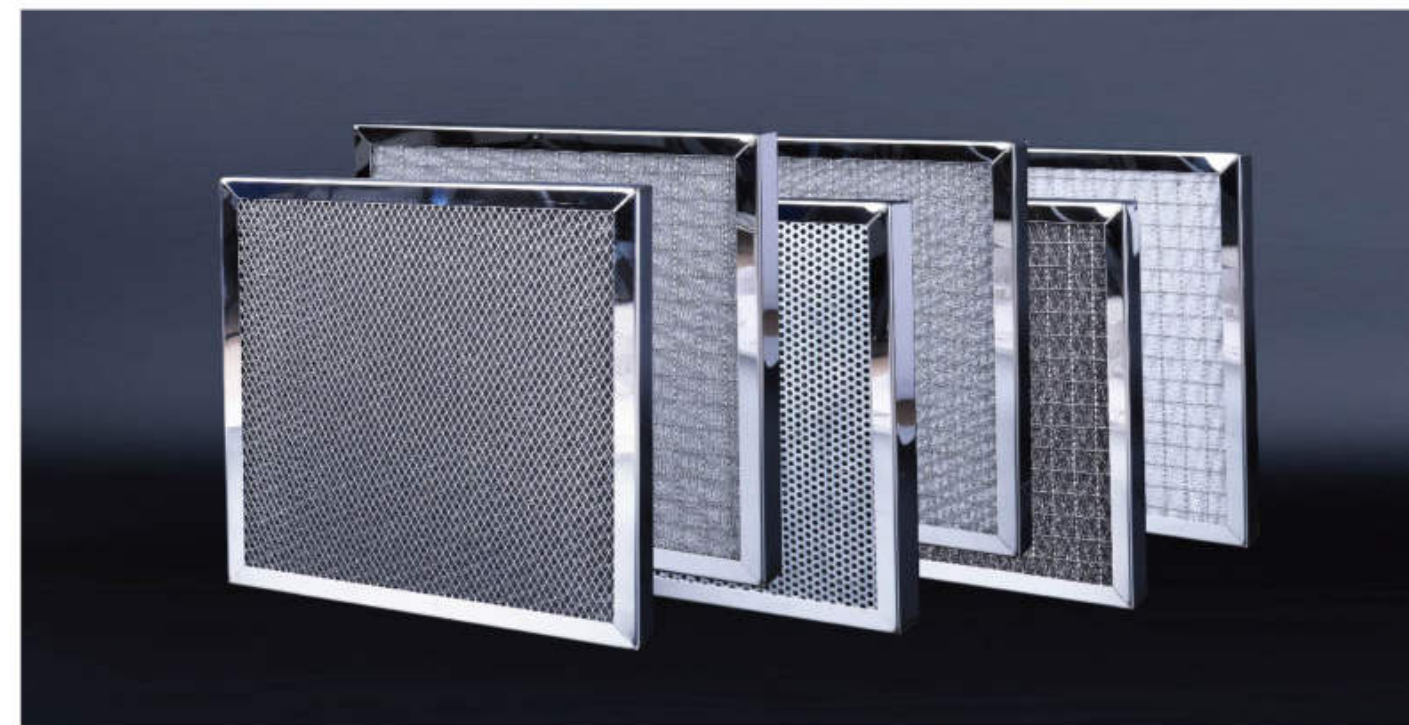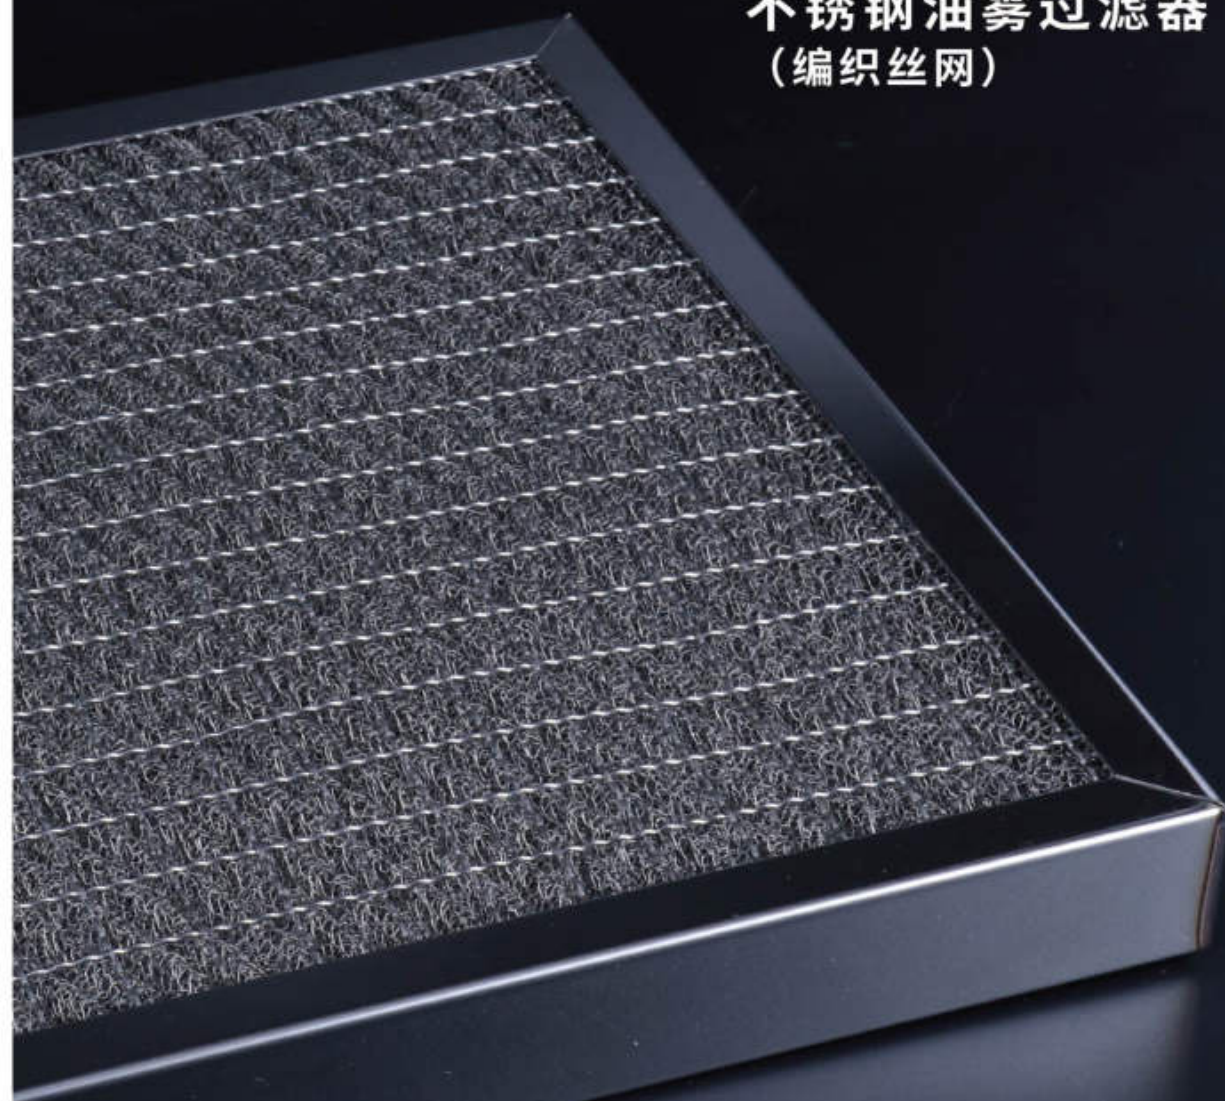

• 产品结构 Product structure:

边框 Panel frame	材镀锌框、铝材(原色)、不锈钢 Galvanized steel, Aluminum(natural), Stainless steel
滤网 Filter material	金属编织网 Metal knitted wire mesh
护网 Protecting wire mesh	筛网、菱形网、冲孔板 Screen, diamond mesh, perforated plate

• 尺寸 Dimension: 长*宽*高 (根据客户要求定制) L*W*H(Non-standard customization)

材质 Material	201、304、316、2205、TA2等 201, 304, 316, 2205, TA2 etc.
-------------	--

• 性能参数 Performance parameter:

对油雾颗粒 > 3um;
Lowest oil mist particle > 3um;

去除效率60%-99% (20-100mm厚);
Removal efficiency 60%-99% (20-100mm thickness);

风速 < 1.5m/s;
Airflow speed < 1.5m/s.



• 特点 Feature:

容量大、耐高温, 可防火, 有效过滤油烟、灰尘及粉末;
Large oil capacity, high temperature resistance, fireproof, effective filtration of fume, dust and powder;

不易氧化寿命长, 可清洗反复使用;
Permanent, durable, washable and not easy to oxidize for a long life;

可根据设备非标定制, 为您量身定制。
Customized according to your request even if non-standard.

• 应用 Application:

机加工油雾净化; 热处理淬火烟雾净化; 压铸和注塑车间空气净化;
餐饮油烟净化器前置过滤;

Machining oil mist purification; heat treatment quenching smoke purification; air purification in die casting and injection molding workshop; pre-filtering for food fume purifier;



浙江国涛滤料科技有限公司
ZHEJIANG GUOTAO FILTER MATERIAL TECHNOLOGY CO., LTD

内贸China markets: 18968448825
外贸Foreign markets: (+86) 15381829498 alina@gtmesh.com

• 产品结构 Product structure:

边框 Panel frame	铝材(原色)、不锈钢 Aluminum (natural),Stainless steel
滤网 Filter material	S形波纹板 S-shaped corrugated plate

• 尺寸 Dimension: 长*宽*高 (根据客户要求定制) L*W*H(Non-standard customization)

材质 Material	铝、304、316等 Aluminum,304,316 etc.
-------------	-------------------------------------

• 性能参数 Performance parameter:

适用大颗粒油滴, 油烟大; Suitable for large particle oil droplets and large fume;
去除效率20%-50%; Removal efficiency 20%-50%;
风速<2m/s。 Airflow speed<2m/s.

• 特点 Feature:

风阻小, 容油量大、耐高温, 可防火; Low airflow resistance, large oil capacity, high temperature and fireproof;
使用周期长, 可清洗反复使用; Permanent, durable and washable for a long service life;
独特的多油道设计, 更有效的解决了多油烟过滤问题 Unique multi-channel design to more effectively solve the problem of more fume filtration;
可根据设备非标定制, 为您量身定制。 It can be customized according to your request.

• 应用 Application:

无烟烧烤车; 油烟净化器; 抽油烟机前置过滤;
Smokeless barbecue car; fume purifier; front range hood filter;

1 初效除油Initial degreasing:

前置的初效油烟过滤网截留掉70%-85%的大颗粒油珠, 后面高压电场的除油效率能提高10%-30%;
The pre-primary oil smoke filter screen intercepts 70%-85% of the large particle oil beads, and the degreasing efficiency of the high-voltage electric field can be increased by 10%-30%;

2 均流板, 降低油烟净化器集油板的清洗频率 The flow board is used to reduce the cleaning frequency of the oil purifier of the lampblack purifier:

通过初效截留掉大颗粒的油珠, 对进入电场的油烟起到均流的效果, 使得静电场集油板的清洗频率大大降低;
By initially removing the oil particles of the large particles, the effect of the current flowing into the electric field is evenly distributed, so that the cleaning frequency of the electrostatic field oil collecting plate is greatly reduced;

3 低风阻 Low airflow resistance:

由于此款除油网独特的S型结构, 风阻较小;
Due to the unique S-shaped structure of this de-oiling mesh, the airflow resistance is small;

4 阻燃 Fire retardant:

预防因火苗窜进烟道引起的火灾隐患; prevent fire hazards caused by fires entering the flue;

5 前置型初效处油烟过滤网的风速 Airflow speed of the oil smoke filter at the front-end type:

经过滤网的风速建议 $\leq 1.5\text{m/s}$, 滤网拦截式的过滤方法通常都是靠滤网与被处理气体的充分接触来实现, 其他条件不变的情况下, 经过滤网的风速越慢, 滤网的除油效果越明显。
the airflow speed through the filter is recommended $\leq 1.5\text{m/s}$, Filter interception filtration methods are usually achieved by sufficient contact between the filter and the gas to be treated. Under other conditions, the slower the airflow speed through the filter, the more obvious the degreasing effect of the filter.

6 可清洗, 便于更换Washable to be changed easily;

1) 根据前置型初效除油烟过滤网的结构设计, 当油的粘稠度不高时, 附着在油烟滤网上的油珠不断累积到一定程度的时候, 油珠们会因重力作用顺着滤网表面的纹路往下流动到底部槽内, 再慢慢累积从漏油孔排出; 只有当油的流动性不强, 或是油烟中含有较多的杂质影响到滤网的通风时, 才需要进行清洗;

According to the structural design of the pre-filter, when the viscosity of the oil is not high, the oil beads attached to the oil smoke filter will accumulate to a certain extent, and the oil beads will follow the gravity. The grain on the surface of the filter mesh flows down into the bottom tank, and then slowly accumulates and drains from the oil leakage hole; only when the fluidity of the oil is not strong, or if the smoke contains more impurities that affect the ventilation of the filter screen, then Carry out cleaning;

2) 初效油烟滤网的清洗: 下班时将前置型初效处油烟过滤网取下来(抽插式安装), 放置在含有洗涤剂(禁烧碱)温度约为 60°C 的水中进行浸泡, 视油烟滤网的洁净程度浸泡相应时长后取出(西式商用厨房的油烟滤网清洗一般在如上环境中浸泡约1-2个小时), 用水冲洗, 待水干后即可重新安装使用。

Cleaning of the pre-filter: Take off the front-end type fume filter at the time of off-duty (push-in type installation), and place it in water containing detergent (causal caustic) at a temperature of about 60°C . The cleanliness of the filter is soaked for a corresponding period of time and then taken out (the oil smoke filter cleaning of the western commercial kitchen is generally soaked in the above environment for about 1-2 hours), rinsed with water, and then re-installed after the water is dry.



Honeycomb
Fume filter

蜂窝
油烟过滤网


油烟过滤系列
Fume filter series



油烟过滤系列
Fume filter series


Hood Fume filter (winding wire)

烟罩油烟过滤网
(缠绕丝)

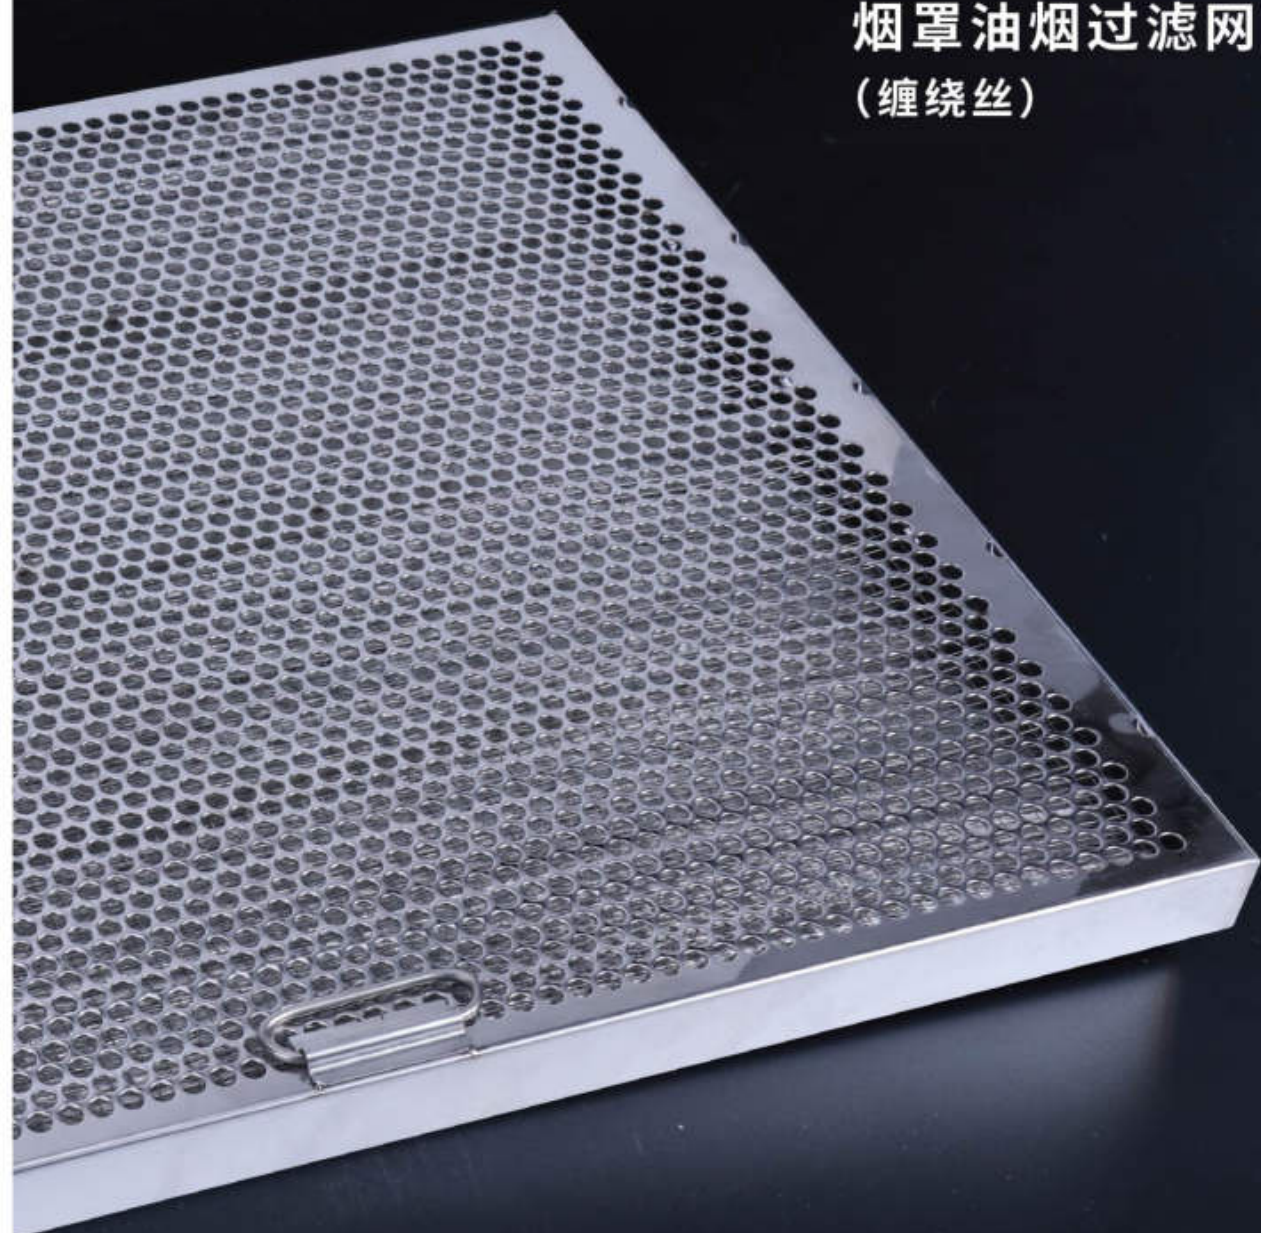

• 产品结构 Product structure:

边框 Panel frame	不锈钢 (可拆卸) Stainless steel(removal)
滤网 Filter material	金属缠绕丝、铝箔 metal winding wire,aluminum foil

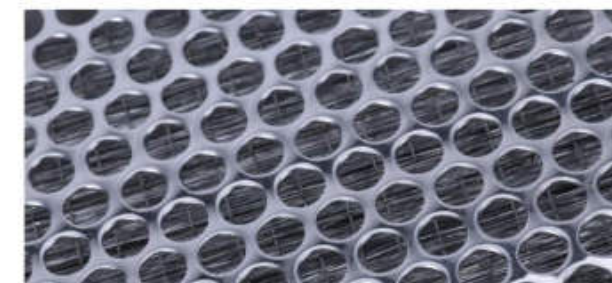

• 尺寸 Dimension: 500*500*25mm (可定制) 500*500*250mm(Non-standard customization)

材质 Material	201、304
-------------	---------

• 特点 Feature:

耐高温，可防火，高效过滤油脂、固体颗粒；
High temperature resistance, fireproof, high efficiency filtration
of grease and solid particles;

可拆卸结构，便于清洗，使用寿命长；
Removable structure for easy cleaning and long service life;

• 应用 Application:

厨房排烟罩及烟道的油烟净化。
kitchen fume hood and flue purification.



浙江国涛滤料科技有限公司
ZHEJIANG GUOTAO FILTER MATERIAL TECHNOLOGY CO.,LTD


内贸China markets: 18968448825
外贸Foreign markets: (+86) 15381829498 alina@gtmesh.com



油烟过滤系列
Fume filter series

Aluminum mesh filter

铝网油烟过滤网

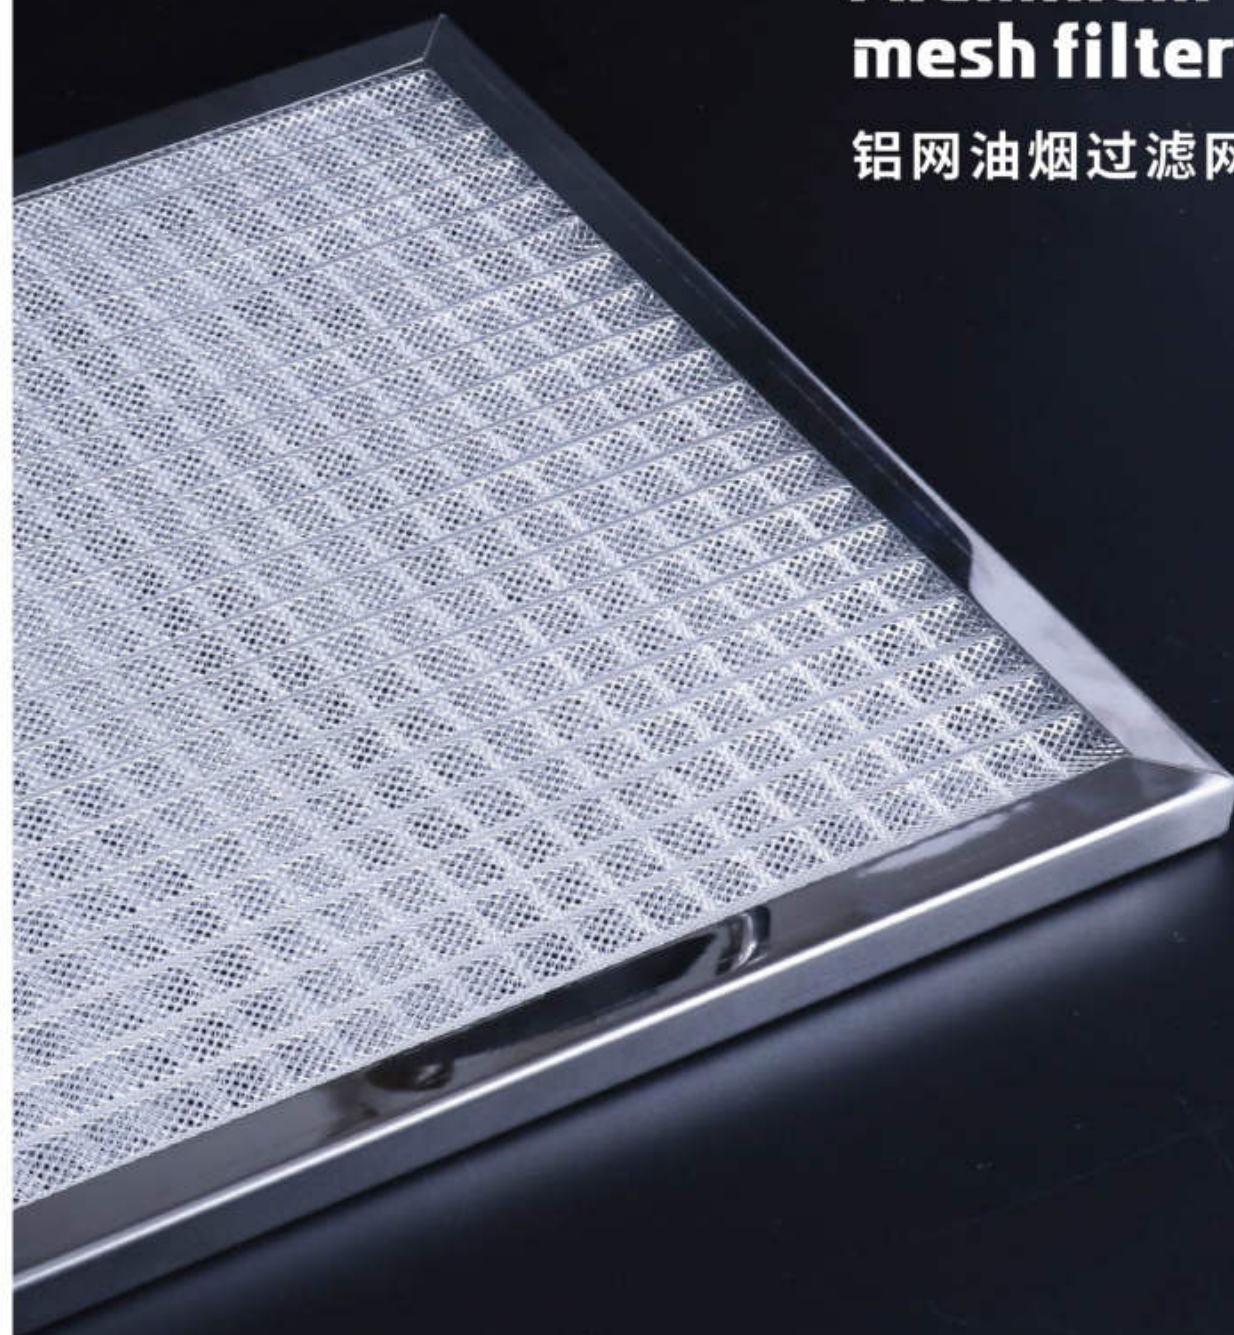

Aluminum foil

铝箔

铝网

Aluminum mesh

• 产品结构 Product structure:

边框 Panel frame	不锈钢、铝材 Aluminum(natural),Stainless steel
滤网 Filter material	铝网波纹板、铝箔 Aluminum corrugated plate,aluminum foil

• 尺寸 Dimension: 长*宽*高 (根据客户要求定制) L*W*H(Non-standard customization)

材质 Material	铝、Aluminum
-------------	------------

• 性能参数 Performance parameter:

适用大颗粒油滴，油烟大；
Suitable for large particle oil droplets and large fume;

去除效率10%-50%；
Removal efficiency 10%-50%;

风速<2m/s (根据滤网密度) ；
Airflow speed <2m/s; (according to filter mesh density).

• 特点 Feature:

多层波纹滤网，初效过滤油烟、灰尘；
Multi-layer corrugated filter screen, filtering fume and dust initially;


压力降低，使用寿命长，可清洗，性价比高；
Low pressure drop, long service life, washable and cost-effective;

长时间耐高温、耐酸。
High temperature and acid resistance for a long time.

• 应用 Application:

用于在一般通风系统中进行初级过滤，以去除灰尘，油烟净化器前置过滤；

Used for primary filtration in general ventilation systems to remove dust, fume filter for front pre-filtering;

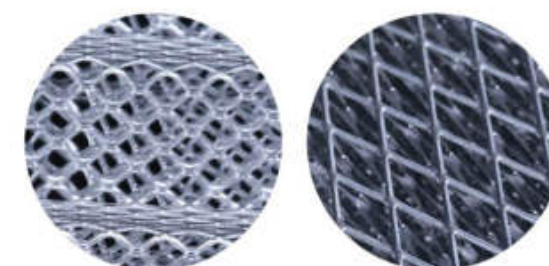

浙江国涛滤料科技有限公司
ZHEJIANG GUOTAO FILTER MATERIAL TECHNOLOGY CO.,LTD

内贸China markets: 18968448825


外贸Foreign markets: (+86) 15381829498 alina@gtmesh.com



空气过滤系列
Air filter series

Nylon Mesh filter

尼龙网过滤器

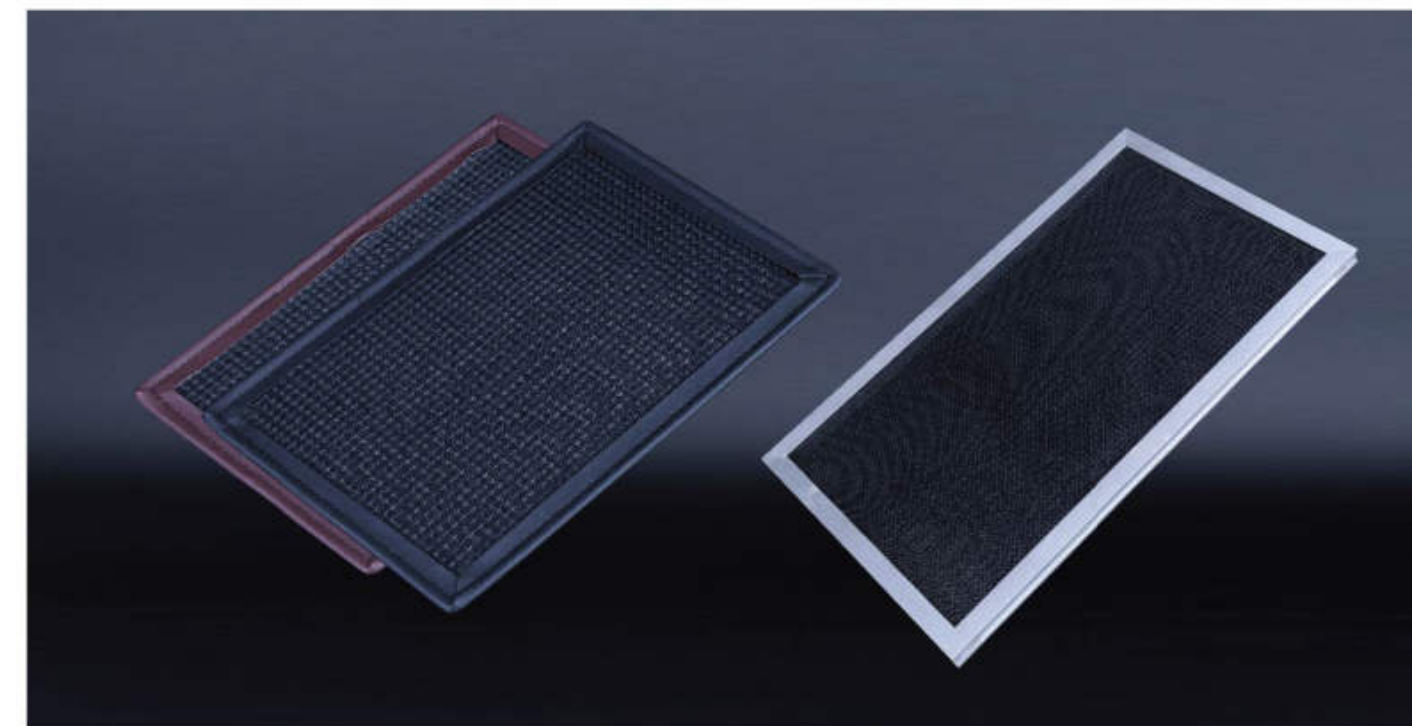

• 产品结构 Product structure:

骨架 Frame	不锈钢、镀锌 Stainless steel, Galvanized steel
滤网 Filter material	PP、PE、PA尼龙网 (10-400目) PP、PE、PA/nylon (10-400mesh)
外框 Panel frame	注塑边框、铝型材、不锈钢框 Plastic, Aluminum, Stainless steel

• 尺寸 Dimension: 长*宽*厚 (根据客户要求定制) L*W*T(Non-standard customization)

材质 Material	铝、Aluminum
-------------	------------

• 性能参数 Performance parameter:

效率: G1-G3(EN779) Efficiency: G1-G3(EN779)
使用最高温度: <150度 Max temperature: <150°C
阻燃, 抗菌防霉, 防火, 无异味 Flame retardant, antibacterial, mildewproof, fireproof, no odor

• 特点 Feature:

粗尘过滤、捕集10μm以上的颗粒尘埃及各种大体积杂物; Rough dust filtration, collecting more than 10μm of particulate dust and various large-sized Sundries;
耐高温, 耐酸碱, 可反复清洗, 过滤效率不受影响; High temperature resistance, acid and alkali resistance, repeatable cleaning, and filtration efficiency are not affected;
使用寿命长, 性价比高; Long service life and high Cost-effective.





• 应用 Application:

中央空调粗过滤, 工业通风设备前置过滤, 制冷设备进风口过滤。
Central air conditioning coarse filtration, industrial ventilation equipment front filtration, refrigeration equipment air inlet filtration.




空气过滤系列
Air filter series

Metal wire Mesh filter 金属网过滤器

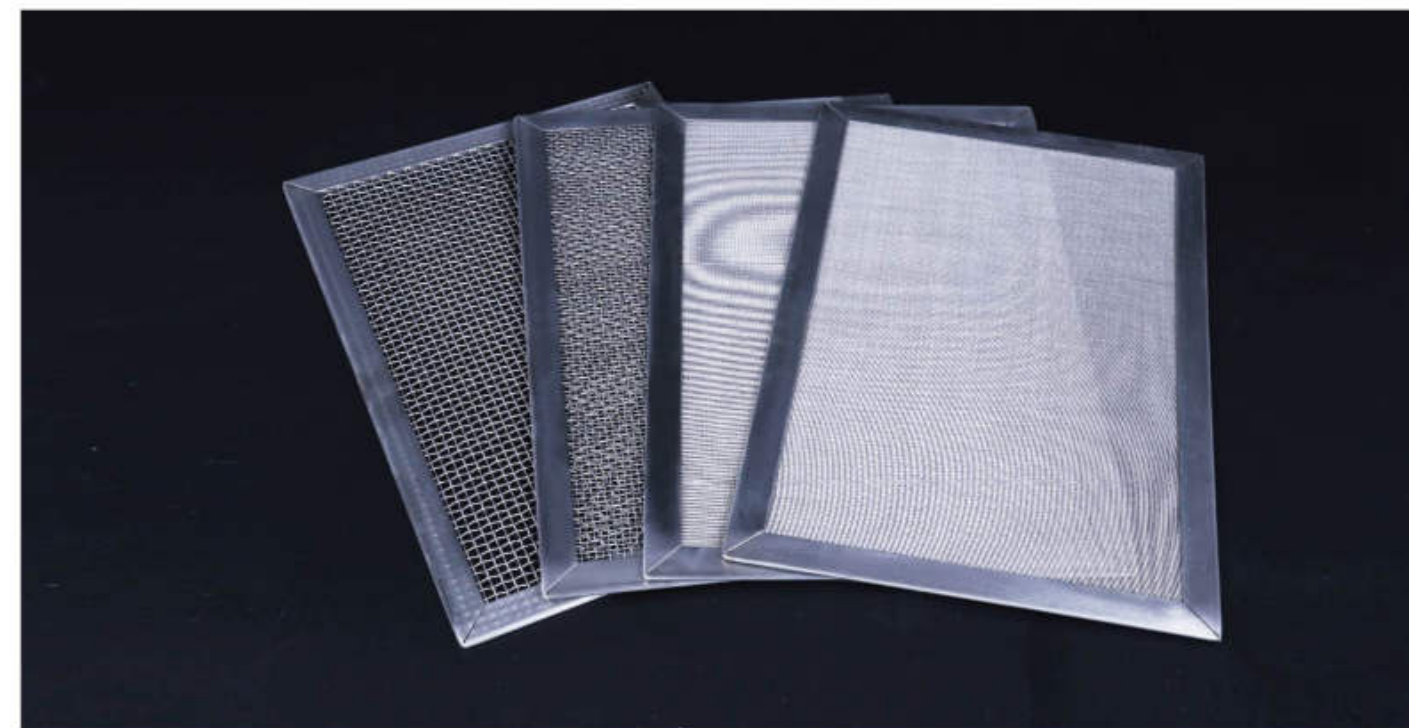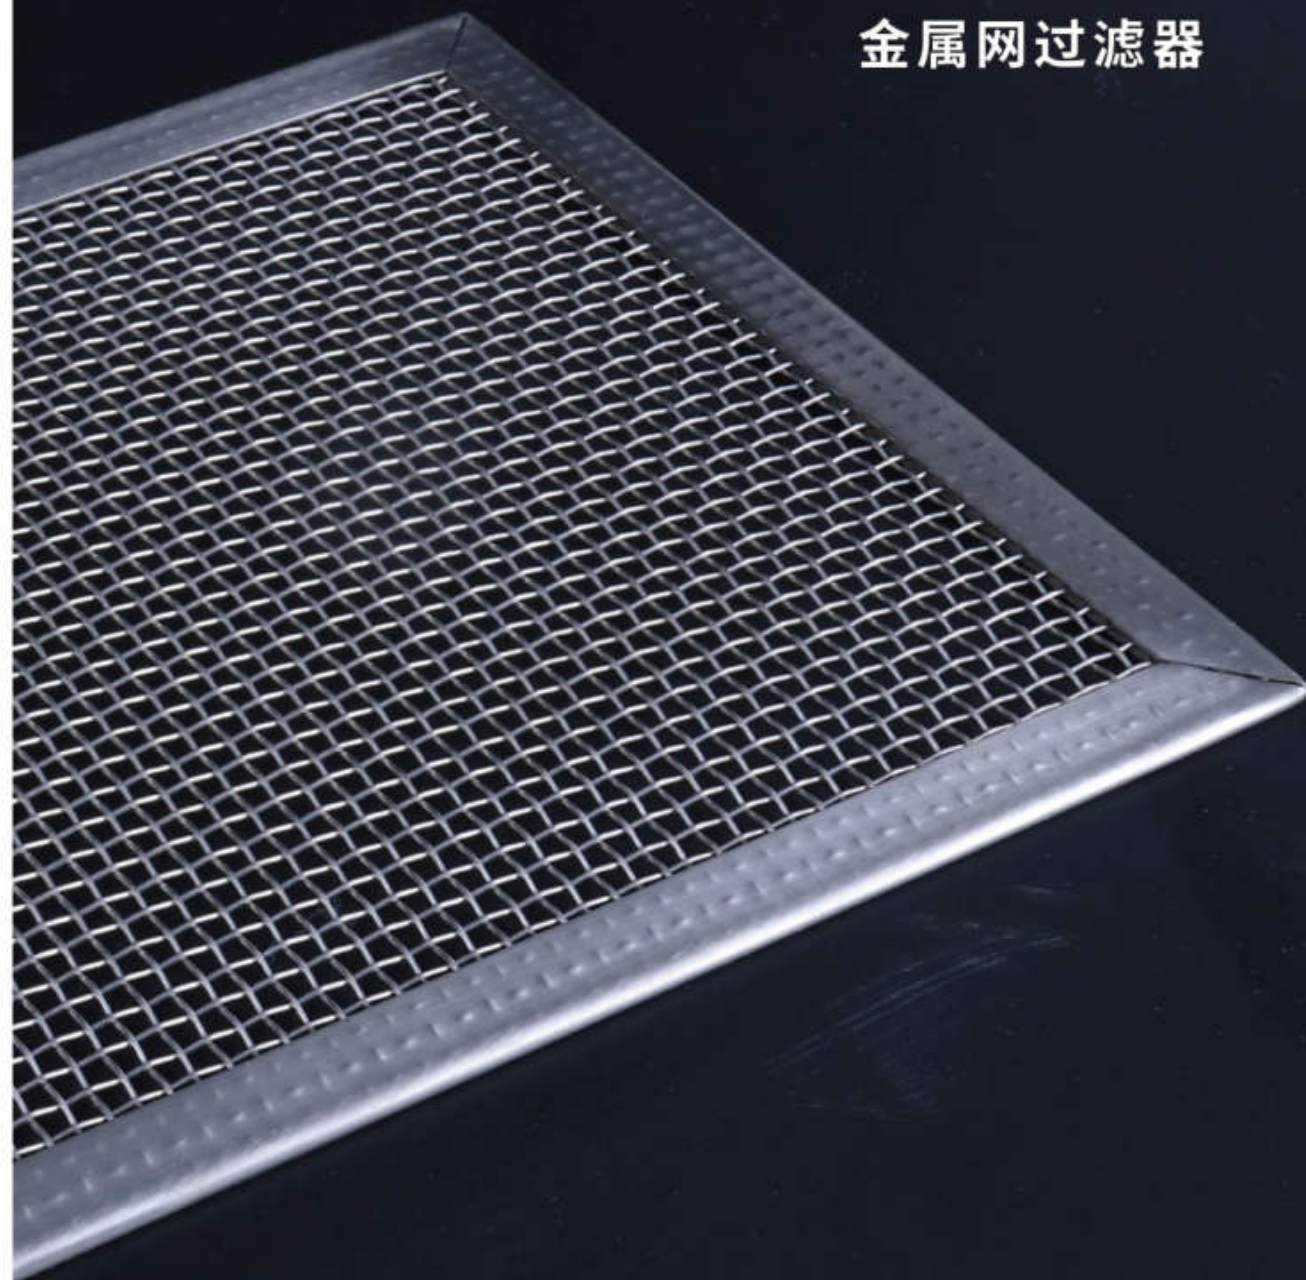

• 产品结构 Product structure:

边框 Panel frame	不锈钢、铝材 Stainless steel, aluminum
滤网 Filter material	筛网、菱形网、波纹网 Screen, diamond mesh, corrugated mesh

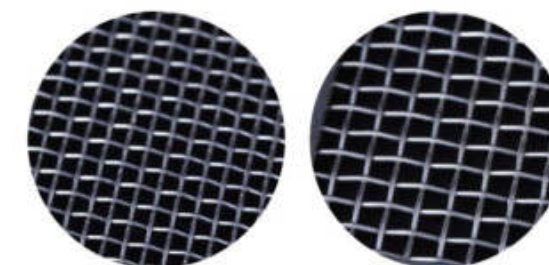

• 尺寸 Dimension: 长*宽*高 (根据客户要求定制) L*W*H(Non-standard customization)

材质 Material	铝、201、304等 Aluminum, 201, 304 etc.
效率 Efficiency	G1-G4(EN779)

• 特点 Feature:

耐高温, 耐酸碱, 高强度; High temperature resistance, acid and alkali resistance, high strength;
使用寿命长, 可清洗, 性价比高; Long service life, washable and cost-effective;

• 应用 Application:

中央空调粗过滤, 工业通风设备前置过滤, 烘箱等耐高温的通风系统; 汽车总装车间的喷漆房过滤;

Central air conditioning coarse filtration, industrial ventilation equipment pre-filtering, oven and other high temperature resistant ventilation system; spray booth filtering in automotive assembly shop;




浙江国涛滤料科技有限公司
ZHEJIANG GUOTAO FILTER MATERIAL TECHNOLOGY CO., LTD

内贸China markets: 18968448825
外贸Foreign markets: (+86) 15381829498 alina@gtmesh.com



空气过滤系列
Air filter series

Pre-filter 初效过滤器

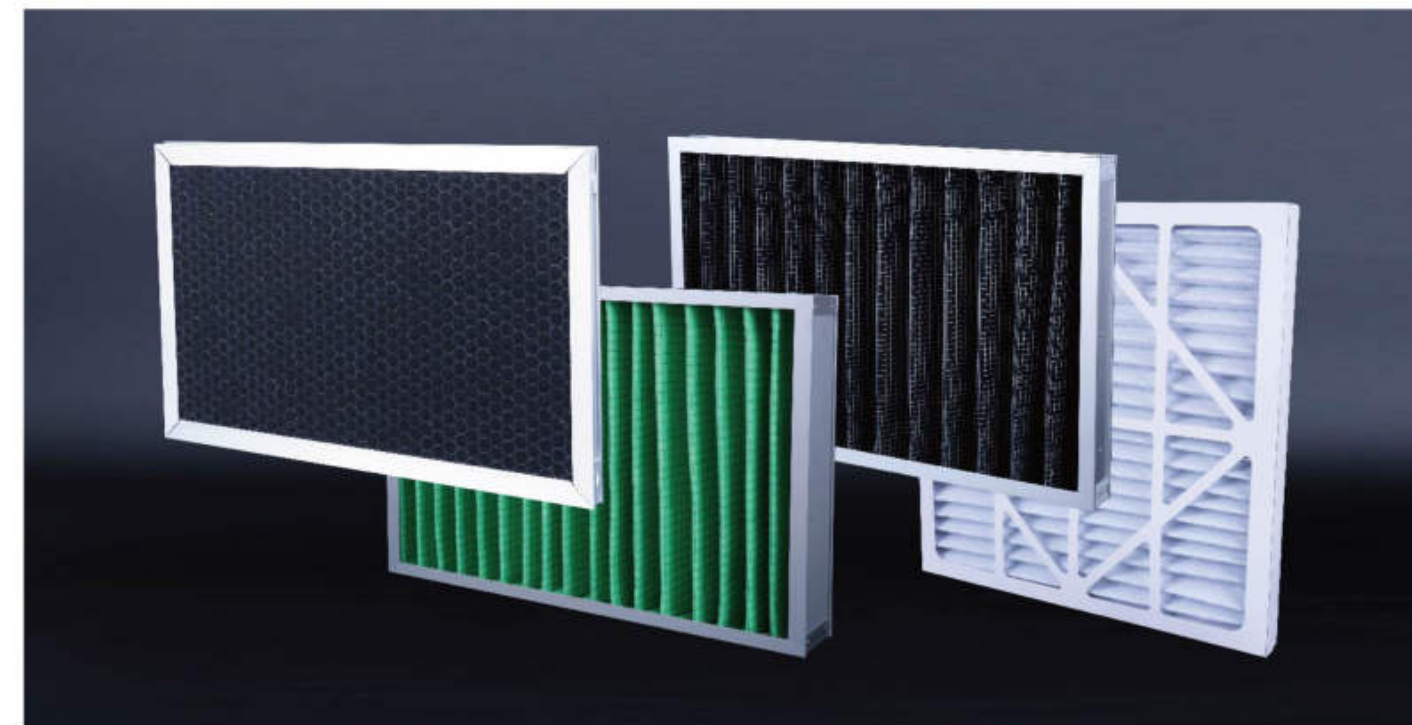

• 产品结构 Product structure:

外框 Panel frame	不锈钢、镀锌板、铝型材 Stainless steel, Galvanized steel, Aluminum
滤网 Filter material	平板式过滤棉、折叠式过滤棉 Flat filter fabric, Pleated filter fabric
防护网 Protecting Wire mesh	镀锌网、铝网、不锈钢网 Galvanized steel wire mesh, aluminium wire mesh, stainless steel wire mesh

• 尺寸 Dimension: 长*宽*高 (根据客户要求定制) L*W*H(Non-standard customization)

• 性能参数 Performance parameter:

效率: G3-F5(EN779)
Efficiency: G3-F5(EN779)

使用最高温度: <70度
Max. working temperature: <70°C

• 特点 Feature:

效率高、阻力低、容尘量大、耐高温、
可在250-350°C环境下长期使用。

High efficiency, low resistance, large dust collecting capacity, high temperature resistance, long-term use in the environment of 250-350 °C.

• 应用 Application:

超净烘箱等要求高温空气净化的设备和系统空气过滤。

Ultra-clean ovens and other equipment and systems that require high-temperature air purification.

平板式
活性炭

折叠式
黑

折叠式
纸框

折叠式
绿



浙江国涛滤料科技有限公司
ZHEJIANG GUOTAO FILTER MATERIAL TECHNOLOGY CO., LTD

内贸China markets: 18968448825
外贸Foreign markets: (+86) 15381829498 alina@gtmesh.com

Bag filters 袋式过滤器



• 产品结构 Product structure:

外框 Panel frame	铝型材、镀锌板、塑料框 Aluminum, Galvanized steel, plastic
滤网 Filter material	熔喷纤维滤料、复合棉、活性炭棉 Meltblown fiber, composite fabric, activated carbon fabric
结构 structure	V型滤袋结构 V-shaped bag filter

• 尺寸 Dimension:
长*宽*高*袋数*效率 (20或25厚法兰)
L*W*H*Pocket No.* efficiency
(20 or 25 mm thickness flange)

• 效率 Efficiency:

F5 (橘色) :计数平均效率40-60% F5 (orange) : Counting average efficiency 40-60%
F6 (绿色) :计数平均效率60-80% F6 (Green) : Counting average efficiency 60-80%
F7 (粉色) :计数平均效率80-90% F7 (Pink) : Counting average efficiency 80-90%
F8 (黄色) :计数平均效率90-95% F8 (Yellow) : Counting average efficiency 90-95%
F9 (白色) :计数平均效率>95% F9 (White) : Counting average efficiency > 95%
使用最高温度: <70度 Max. working temperature: <70°C

过滤级别 Efficiency	尺寸(mm)Dimension 宽x高x深 W*H*T	袋数 Pocket No.	不同风量下初阻力 Initial resistance under different airflow					
			Pa	m3/h	Pa	m3/h	Pa	m3/h
G4-F9	595x595x600	8	25	2300	50	3500	85	4500
	595x595x600	6	25	2100	50	3200	85	4300
	495x595x600	6	25	2000	50	3000	85	4200
	295x595x600	3	25	1100	50	1800	85	2300

• 特点 Feature:


有效过滤面积大,容尘量大,使用寿命长; Large effective filtration area, large dust collecting capacity and long service life;
更换滤袋方便快捷,大大降低了运行成本的费用; Replaced the filter bag quickly and easily and reduced the cost of running costs greatly;

• 应用 Application:

商业及工业通风空调系统的主过滤器; 洁净室新风系统。 Master filter for commercial and industrial ventilation and air conditioning systems; clean room fresh air system.
--

Hepa filter 高效过滤器

耐高温高效箱式过滤器
High temperature and High efficiency box filter

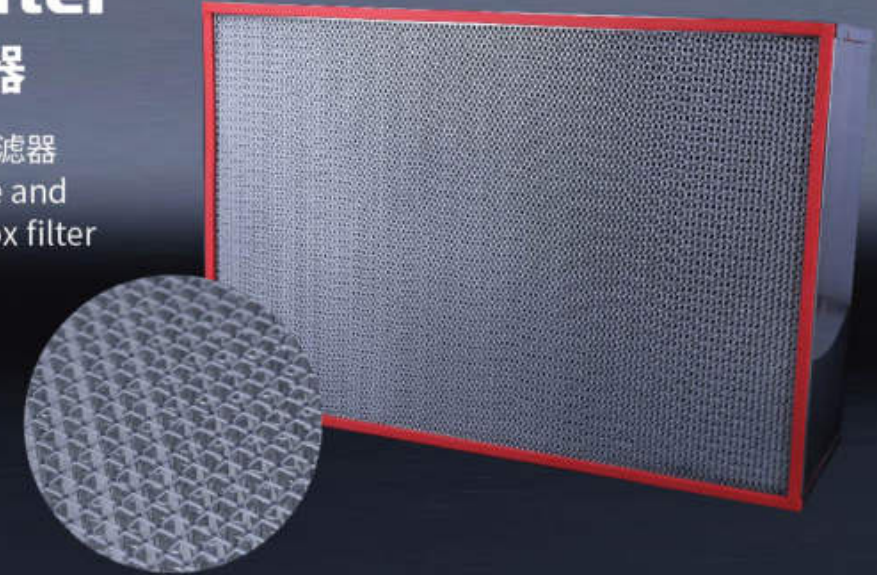

• 产品结构 Product structure:

外框 Panel frame	镀锌板、不锈钢板 Galvanized steel, Stainless steel
滤网 Filter material	超细玻璃纤维滤纸 (美国H&V) Ultra-fine fiberglass filter paper (USA H&V)
密封胶 Seal edge	聚氨酯 PU

• 尺寸 Dimension:
长*宽*高*效率 L*W*H*Efficiency

• 性能参数 Performance parameter:

效率: H10-H14 Efficiency: H10-H14
使用最高温度: <350度 Max. working temperature: <350°C

• 特点 Feature:

效率高、阻力低、容尘量大、耐高温、可在250--350°C环境下长期使用。 High efficiency, low resistance, large dust collecting capacity, high temperature resistance, long-term use in the environment of 250--350°C.
--

尺寸(mm)			额定风速 (m³/h)	不同风速的初阻力(Pa)			过滤效率%
宽度	高度	厚度		0.25m/s	0.5m/s	0.75m/s	
320	320	220	400	≤120	≤220	≤240	99%
484	484	220	1000				99.9%
610	610	150	1000				99.99%
630	630	220	1500				99.999%
610	610	292	2000				99.999%
过滤级别	H10, H11, H12, H13, H14(EN779)			过滤效率		99%, 99.9%, 99.99%, 99.99999%, (ASHRAE12.1-1982)	
耐湿性 (相对湿度)	≤99%RH			过滤对象		≤0.5μm, ≥0.3μm	
耐受温度	400°C			耐温度		≤250°C, ≤350°C	

• 应用 Application:

超净烘箱等要求高温空气净化的设备和系统空气过滤。 Ultra-clean ovens and other equipment and systems that require high-temperature air purification.

Hepa filter 高效过滤器

高效无隔板过滤器
Hepa filter with no compartment



铝框 Aluminum

Paperboard 纸框

• 产品结构 Product structure:

外框 Panel frame	铝外框、纸框 Aluminum, Paperboard
滤网 Filter material	化纤滤纸, 超细玻璃纤维滤纸 (美国H&V) Synthetic filter paper, ultra-fine fiberglass filter paper (USA H&V)
护网 Protecting wire mesh	铝质护网或喷塑护网 Aluminum, Sprayed



• 尺寸 Dimension: 长*宽*高效率 (非标定制) L*W*H*Efficiency (Non-standard customization)

• 性能参数 Performance parameter:

效率: H10-H14 Efficiency: H10-H14
使用最高温度: <70度 Max. working temperature: <70°C

• 特点 Feature:

去除PM2.5及小颗粒, 其具有体积小、重量轻、安装方便、效率稳定的优点。
It removes PM2.5 and small particles, and has the advantages of small volume, light weight, convenient installation and stable efficiency.

• 应用 Application:

医院或无尘净化车间的空调末端送风处。
Air conditioning end air supply at the hospital or dust-free purification workshop.

Dimensions (H x W)		Air Flow
(Inches)	(mm)	m ³ /Hr @0.45m/s
12×12	305×305	150
24×12	610×305	300
24×24	610×610	600
30×24	762×610	750
36×24	915×610	900
36×36	915×915	1350
48×36	1210×610	1200
48×36	1210×915	1800
48×48	1210×1210	2400

注: 阻力 +/-15% 可定制任意非标尺寸
Noted: Resistance +/-15% (Non-standard customization)

Hepa filter 高效过滤器

大风量高效过滤器
High air volume high efficiency filter



• 产品结构 Product structure:

外框 Panel frame	塑料外框 (W型和V型两种形式) Plastic (W-shaped and V-shaped)
滤网 Filter material	利用较薄的超细玻璃纤维滤纸无隔板滤芯 Thinner ultra-fine fiberglass filter paper without compartment cartridges



• 性能参数 Performance parameter:

效率: 从中效 (F6-F9)、亚高效(H10-H12)到高效(H13-H14), 有多种效率供客户选择。
Efficiency: From medium efficiency (F6-F9), sub-efficient (H10-H12) to high efficiency (H13-H14), there are many efficiencies for your choice.

使用最高温度: <70度
Max. working temperature: <70°C


• 特点 Feature:

组合式高效过滤器过滤面积大, 风量大, 阻力低, 使用寿命长, 主要用于洁净通风空调系统中。
The combined high-efficiency filter has large filtration area, large air volume, low resistance and long service life, and is mainly used in clean ventilation and air conditioning systems.

• 应用 Application:

医院或无尘净化车间的空调末端送风处。
Air conditioning end air supply at the hospital or dust-free purification workshop.

尺寸 Dimension (W*H*T)	额定风量 Rated air volume m ³ /h	效率% Filtering rate 0.3μm	滤芯 Cartridge Pcs
592*490*290	1000	>99.95%	4
592*287*292	1500		6
592*592*292	2100		8
592*592*292	2700		10
592*592*292	3400		12

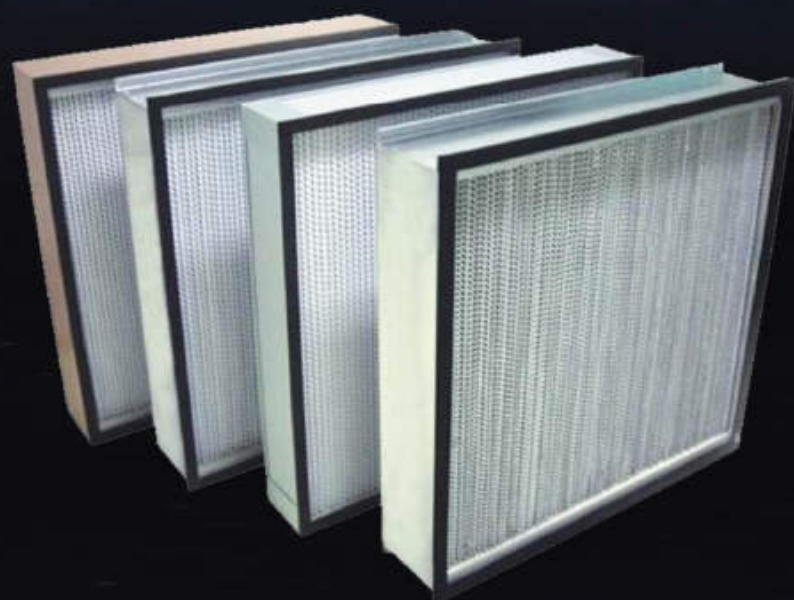

Hepa filter 高效过滤器

高效有隔板过滤器
Hepa filter
with compartment

• 产品结构 Product structure:

外框 Panel frame	镀锌板、铝板或不锈钢 Galvanized steel, Aluminum, Stainless steel
滤网 Filter material	内折叠超细玻璃纤维滤纸+纸隔板/铝隔板 Folded ultra-fine fiberglass filter paper + paper/ aluminum compartment
密封胶 Seal edge	聚氨酯 PU

• 性能参数 Performance parameter:

效率: H10-H14
Efficiency: H10-H14

使用最高温度: <70度
Max. working temperature: <70°C

• 特点 Feature:

风速均匀性好, 效率高, 低阻力, 容尘量大的特点。

Good airflow uniformity, high efficiency, low resistance, large dust collecting capacity.

• 应用 Application:

常温, 常压下环境空气的净化。

Air purification under normal temperature and pressure.

外形尺寸 Dimension (W*H*T)	初阻力Pa Initial resistance	标准型 Rated air volume Standard	容尘量 Dust collecting capacity	重量 Weight
305*305*150	≤220Pa	250	350	≈3.4
320*320*220		350	400	≈4
305*610*150		500	600	≈6.5
315*630*220		750	750	≈7.7
480*480*220		1000	750	≈8.5
610*610*150		1000	800	≈11.5
726*484*220		1400	900	≈10
915*610*150		1500	900	≈13
630*630*220		1500	900	≈13
968*484*220		1500	1200	≈15
1220*610*150		2000	1200	≈12.5
945*630*220		2200	1400	≈19
1260*630*220		3000	1800	≈23

Nylon filter mesh 尼龙过滤网

此产品通过ROSH环保认证,
欧洲标准EN45545-2 轨道交通阻燃防火测试合格,
无甲醛。

This product has passed the ROSH environmental certification, and approved by the European standard EN45545-2 all tests of flame retardant, fireproof, and no formaldehyde.


尼龙过滤网为凹凸式蜂巢结构, 应用于各种空气过滤系统, 是环保领域的新产品, 产品易于多次清洗调换, 起效时间持久, 有四大品类30多种规格, 材质覆盖PE, PP, PA, PET, 提供添加抗菌剂定制服务。宽幅和长度可根据客户要求定制, 提供网片的热切加工, 还可制成特殊规格的折叠网。

Nylon filter mesh is a concave-convex honeycomb structure, which is applied to various air filtration systems. It is a new product in the field of environmental protection. The product is easy to be cleaned and replaced many times. It has a long-lasting effect. There are four series and more than 30 specifications. The material covers PE, PP, PA, PET, provide customized services for adding antibacterial agents. Width and length can be customized according to customer requirements, providing hot cutting of mesh, and can also be made into special specifications of folding net.

• 产品介绍 Product introduce:

功能 Feature	阻燃, 防火, 抗菌防霉, 抗紫外线 Flame retardant, fireproof, antibacterial, mildewproof, UV resistant.
颜色 Colors	黑色/白色/乳白色/绿色/蓝色等 Black/White/Cream/Green/Blue etc.
密度 Density	20-200目 (风阻<10pa) 20-200 mesh (wind resistance <10pa).
克重 Weight	70-230g/m²
宽幅 Width	0.5-2.4m

Gas liquid Filter mesh 气液过滤网

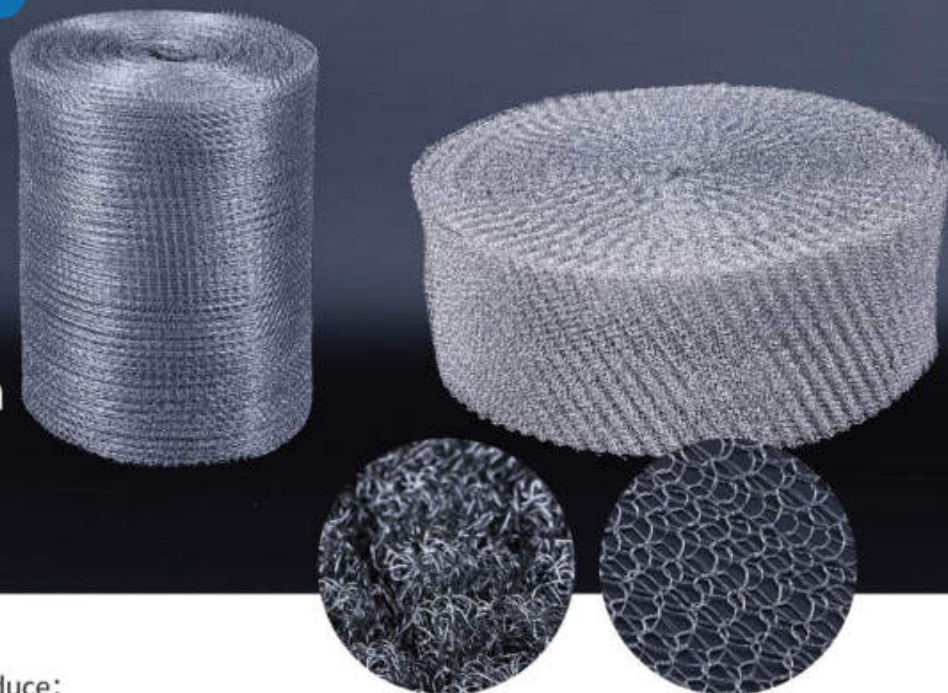

• 产品介绍 Product introduce:

材质 Material	塑料 (PE,PP,PTFE)、金属 (201,304,2205,TA2等) Plastic(PE,PP,PTFE),Metal(201,304,2205,TA2 etc.)
丝径 Wire	0.08~0.3的圆丝或扁丝; 单股编织、多股编织、金属丝与非金属丝 (各种纤维) 编织等、 根据需要在丝网上压轧制成各种规格样式的波纹形。 0.08~0.30mm dia.,round or flat, single or Multiple knitted, metal and another fiber. It can be rolled into various corrugations of various specifications on the screen as your request.
宽幅 Width	0.3-1m
常用规格 Normal types	SP标准型 SP standard type: 40-100 60-150 105-300 140-400 160-400 200-570 DP高效型 DP high efficiency type: 60-100 80-100 80-150 90-150 150-300 200-400 300-600 HR高穿型 HR high Penetrating type: 20-100 30-150 70-400 100-600 170-560 HP阻尼型 HP Damping type: 33-30 38-40 20-40 26-40 30-40 30-50 48-50 30-60 30-80 50-120

Diamond Mesh 菱形网



材质 Material	铝(Aluminum), 201,304, TA1;
板厚 Thickness	0.1-1.5mm
孔径 Aperture	2.5*4-10*20mm
幅宽 Width	0.15-1.2m

Activated carbon Filter fabric 活性炭过滤网



孔径 Aperture	20-40PPI
克重 weight	40-50kg/m³
尺寸 size	1M*2M
厚度 Thickness	3mm-30mm

Coconut shell Filter fabric 椰棕过滤棉



厚度T hickness	30mm-50mm
克重 weight	600-1200g/m²
尺寸 size	1M*2M
可以定做其他的规格 Customization as your request.	

Sprayed glue Synthetic fabric 喷胶纤维棉



厚度 Thickness	5mm-12mm
颜色 color	白色/黑色/绿色 White/Black/Green
克重 weight	150-500g/m²
宽度 width	0.5-2m
效率 Efficiency	G1-G4

Heat melted Synthetic fabric 热熔纤维棉



厚度 Thickness	10mm-25mm
克重 weight	150-600g/m²
宽度 width	0.5-2m
效率 Efficiency	G1-F7
定制 Customization	覆网, 立体胶 Wire mesh coated, 3D glue.




浙江国涛滤料科技有限公司
 ZHEJIANG GUOTAO FILTER MATERIAL TECHNOLOGY CO., LTD.

内贸China markets: 18968448825
 外贸Foreign markets: (+86) 15381829498 alina@gtmesh.com

Filter Material 过滤器 24